


INTERNATIONAL FABRICS

FIBER ART FOR PERFORMANCE FABRICS
100% SOLUTION DYED ACRYLIC


(agora)


STANDARD PANAMA

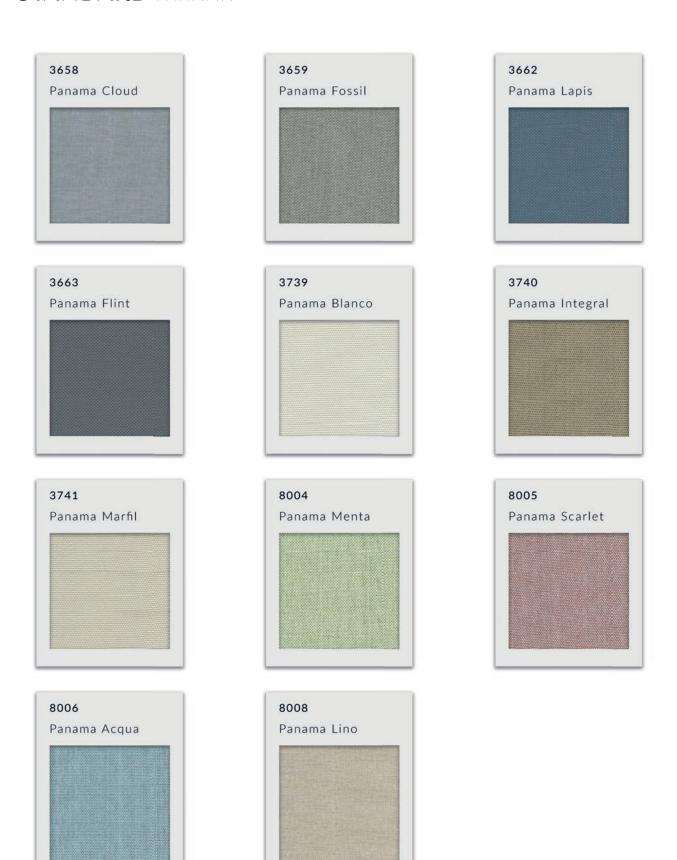


PREMIUM ARTISAN
















PREMIUM BRUMA
















WINTER COVERS

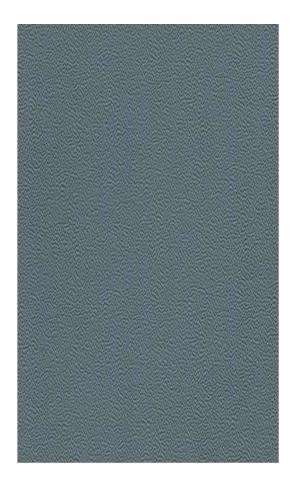



6928
—
AGORA COVER PRO GRAFITO



6921 — AGORA COVER PRO MARFIL



6922 — AGORA COVER PRO AVENA



6923 — AGORA COVER PRO SILVER

(agora) TECHNICAL FILE PANAMA (STANDARD)

	Comon				
100% Solution	n Dyed Acrylic				
WIDTH WEIGHT LEN	GHT OF ROLLS ———— LIGHT FASTNESS —				
160 cm / 63" 280 gr / m2	50 ml 7 / 8				
FI	NISH				
Water repellent with stain resistant treatment					
FIBER S	STRUCTURE ——————				
The strong link between the carbon is not destroyed, so the color does not change with the passage of time.					
———— WARRANTY ————	TOLERANCE —				
5 years *	Sensitive values of tolerance of + / - 5%				
CLEANING INSTRUCTIONS					
<u>30</u> <u>c</u>					
APPLICATION					
	NAL FABRIC TREATMENT				
WATERPROOF	FLAME RETARDANT				
- Laminated 1000 mm	- UNE 1021 PARTS 1-2 - IMO PEF 2010 Anex 1. Part 8				

(*) The Agora warranty covers the fabric becoming unserviceable as a result of loss of colour or strength from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemical, if the fabric has been properly installed, utilized and main tained. The warranty does not cover labour and installation supplied by the dealer. The warranty also

does not apply against deterioration of any kind due to abusive use, accidental burns, negligence or perforations.









- BS 5852 Cigarrete & Match

(agola) TECHNICAL FILE ARTISAN (PREMIUM)

COMPOSITION

	— COMPOSITION —	
10	0% Solution Dyed Acrylic	
— WIDTH — WEIGHT —	LENGHT OF ROLLS	LIGHT FASTNESS —
160 cm / 63" 450 gr / m2	30 ml	7/8
	FINISH —	
Water rep	pellent with stain resistant treatm	nent
	— FIBER STRUCTURE ———	0.000
The strong link between the carl destroyed, so the color does n with the passage of time.		
WARRANTY	TOLERA	ANCE
5 years *	Sensitive values + / -	
	CLEANING INSTRUCTIONS	
30		\boxtimes
	— APPLICATION —	
DIFFER	ENT OPTIONAL FABRIC TREATM	ENT —
WATERPROOF	FLAME RETARDANT	
- Laminated 1000 mm	- UNE 1021 PARTS 1-2	

(*) The Agora warranty covers the fabric becoming unserviceable as a result of loss of colour or strength from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemical, if the fabric has been properly installed, utilized and main tained.

The warranty does not cover labour and installation supplied by the dealer. The warranty also does not apply against deterioration of any kind due to abusive use, accidental burns, negligence or perforations.









- IMO PEF 2010 Anex 1. Part 8

(agora) TECHNICAL FILE BRUMA (PREMIUM)

(COMPOSITION ————	
100% Sol	ution Dyed Acrylic	
— WIDTH ——— WEIGHT ———	LENGHT OF ROLLS ——	LIGHT FASTNESS –
160 cm / 63" 400 gr / m2	30 ml	7 / 8
	- FINISH	
Water repellent	with stain resistant treatm	nent
FII	BER STRUCTURE ———	
The strong link between the carbon is destroyed, so the color does not cha with the passage of time.		5 H H C N L C N
WARRANTY ——	TOLERA	ANCE —
5 years *	Sensitive values + / -	
CLEAN	ING INSTRUCTIONS	
30 CI		\boxtimes
A	PPLICATION —	
DIFFERENT O	PTIONAL FABRIC TREATM	ENT —
WATERPROOF	FLAME RI	ETARDANT
- Laminated 1000 mm		1021 PARTS 1-2 PEF 2010 Anex 1. Part 8

(*) The Agora warranty covers the fabric becoming unserviceable as a result of loss of colour or strength from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemical, if the fabric has been properly installed, utilized and main tained.

The warranty does not cover labour and installation supplied by the dealer. The warranty also does not apply against deterioration of any kind due to abusive use, accidental burns, negligence or perforations.









- BS 5852 Cigarrete & Match

(agola) TECHNICAL FILE WINTER COVERS

		- COMPOSITION -		
Polyester				
— WIDTH ——	— WEIGHT —	— LENGHT OF ROLLS ——	——— THICKNESS —	
220 cm / 86"	400 gr / m2	50 ml	0,35 mm	
		— COATING —		
		PVC coating 2 faces		
		- TEAR STRENGTH -		
WARP		WE	WEFT	
- 13 daN		- 10 daN		
ТЕМРЕ	RATURE RESISTEN	CE TOLERA	NCE-	
	- 30° / + 70°	Sensitive values of + / - 9		
		- APPLICATION		

CHARACTERISTICS

Panama, Artisan, Bruma & Winter Covers



Water Resistant



Stain Resistant



Mold Resistant



UV Protect



UV Resistant



Durable Strong



NO Conductor



Easty to clean



INTERNATIONAL FABRICS

www.skylinedesign.es